

Lantech®

It's a Lantech!

S-300XT
Simple Automation™
Stretch Wrapping System

Work Smarter ... Keep Your Driver on the Forklift!

- *Patented XT Cut and Clamp® Automatically Captures the Stretch Film and Cuts it at the End of the Wrap Cycle.*
- *Save 2 Minutes of Forklift Driver Labor per Load.*
- *No Scheduled Preventative Maintenance.*




S-300XT

S-300XT

Eliminate the "run-around" with Simple Automation in a fast - paced environment.



S-300XT automatically attaches and cuts the film. Equipped with a fully protected mechanical cut & clamp. Improve productivity by keeping the operator on the forklift.

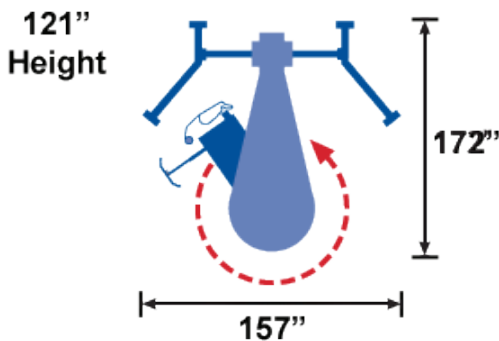

S-300XT Specifications

PERFORMANCE CRITERIA

■ Production Speed	30-40 loads per hour
■ Maximum Load Diagonal	76"
■ Maximum Load Height	80"
■ Minimum Load Dimensions	30"Wx30"Lx20"H

FILM DELIVERY SYSTEM

■ Power-Roller Stretch Plus System	200% Standard (100%-300% available)
■ Wrapping Force	Electronically controlled
■ Film Capacity	10" Roll Diameter, 20" Film Web Width
■ E-Z Thread Roll Carriage	Standard
■ Pallet Grip®	Standard

MACHINE SHIPPING WEIGHT

■ Machine Size	144"Wx157"Lx121"H
■ Shipping Weight	3300 lbs. (including skid - approximate)

ELECTRICAL REQUIREMENTS

■ Machine Voltage	115V, 20 Amp
■ Microcontroller	Standard
■ UL-Approved NEMA 12/enclosure	Standard

SERVICE SUPPORT

24 hrs/7 days a week

Specifications subject to change without notice. Lantech systems and sub-systems are protected by U.S. and foreign patents. Additional U.S. and foreign patents pending. © Lantech

Boost your machine's performance with these patented features:

Click-n-Go™

Stretch Wrapping Loads at the Touch of a Button!



Enhances portability by eliminating requirement to install a ceiling-mounted lanyard.

Each unit can handle up to 3 machines.

Click-n-Go remote meets the latest safety requirements outlined by the National Electrical Code.

Using infrared technology and two-step activation process, the Click-n-Go is immune to accidental activation from stray radio frequency.

Tons of Options Available

- 30" Film Delivery System
- 15 RPM Wrap Arm Speed
- 110" Wrap Height
- Base Mount
- Cold Package
- Extended Warranty
- Lexan Plastic Cover
- Pre-stretch Gears 100-300%
- Seismic Protection Package
- Static Collection Brush
- Top Sheet Wrap
- Two-Speed Roll Carriage and Wrap Arm
- Wrap Cycle Pause . . . and more!